


Fiber Multiport Service Terminal Box


Product Diagram

2 or 4 Port Optitap Compatible MST 2 / 4 Fiber Flat Drop Blunt Pigtail Toneable Fujikura G657.A1
 Available in Lengths of 100, 250, 500, 750, 1000, 1250, 1500, and 1750FT

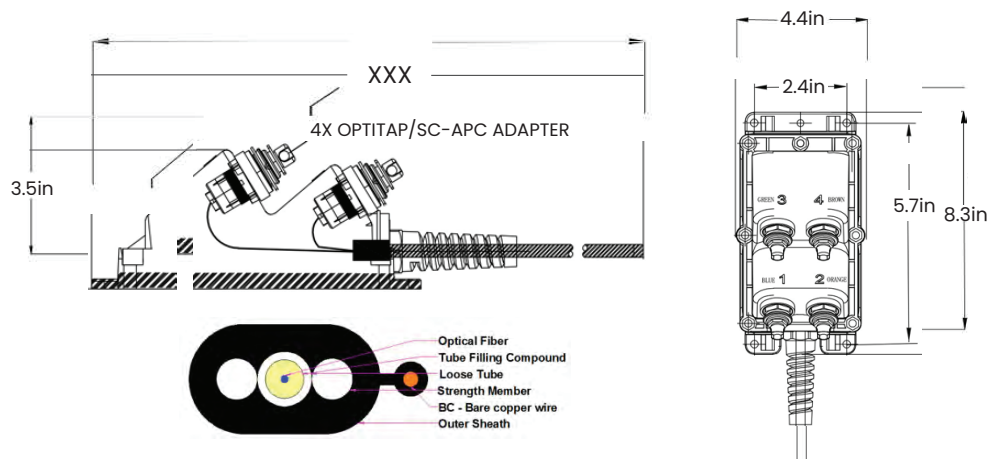

Mounting Solution (Aerial)

Aerial Mount Kit



Technical Parameters

Dimensions (H x W x D)	8.5 x 4.5 x 3.5in (215 x 115 x 90mm)
Connector Support	Hardened SCAPC
Insertion Loss (dB) @1310&1550nm	Typical <0.3, Max <0.5
Return Loss (dB)	>60
Operation Temperature	-40 to 158°F (-40 to 70°C)
Ingress Protection	IP68
Installation Mounting	Pole, Aerial, Wall
Glass Type	Fujikura G657.A1